

SDG500

MEMS Quartz Angular Rate Sensor

Ideal for High Performance Commercial Applications:

- Attitude Control for Small Business & Regional Aircraft
- Antenna, Optical Platform Stabilization & Pointing
- Instrumentation
- Motion Control
- Robotics & Robotic Vehicles



Key Performance Features:

- **Outstanding Vibration & Noise Performance**
- **Exceptional Bias Stability**
- **Compact Size, No Wear-Out Mechanisms**
- **High Reliability & Long Life**
- **DC Voltage Input/High-Level Analog DC Voltage Output**
- **Adaptable – No Software Required**




The SDG500 single-axis angular rate sensor provides exceptional performance versus similar sensors in its class, with a lower noise capability superior to silicon-based gyros. The SDG500 utilizes our proven Quartz MEMS sensing technology and fully-contained electronics in a durable, compact size.

By applying design techniques found only in more expensive rate sensors, excellent bias stability, temperature performance, noise, and vibration performance levels have been achieved.


SDG500

MEMS Quartz Angular Rate Sensor

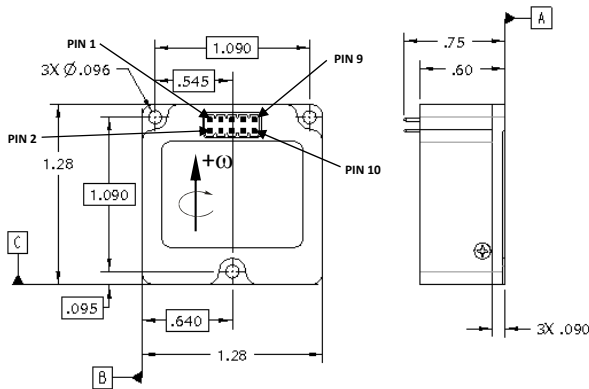


SDG500 PIN ASSIGNMENT

PIN #	Function
1	+Vdc input
2	Power Ground
3	-Vdc Input
4	Temp Output
5	Signal Return
6	Rate Output
7	No Connection
8	Self Test Input
9	Case Ground
10	Built-In Test

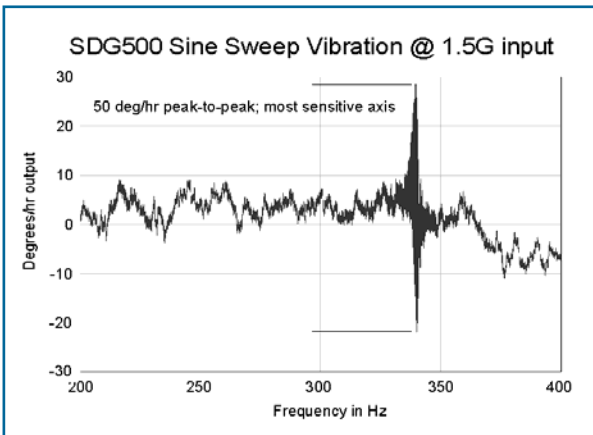

SDG500-00100-100	
Power Requirements	
Input Voltage	+ and - 10 to 15 Vdc
Input Current	< 20 mA (each supply, typical)
Performance	
Standard Range Full Scale	± 100°/sec
Full Scale Output (Nominal)	± 5.0 Vdc
Scale Factor (at 25°C, Typical)	0.050 ± 0.001 Vdc/°/sec
Scale Factor Over Temperature	≤ 0.1%/°C
Bias Calibration (at 25°C)	≤ 1.5°/sec
Bias Variation over Temperature (Dev. from 25°C)	≤ 5°/sec
Bias Stability (In-Run at Constant Temp., Std. Dev.)	< 20°/hr. typical
G Sensitivity	< 0.06°/sec/g
Start-Up Time	< 1.0 sec
Bandwidth (-90°, incl. temp. effect)	60 ± 15 Hz
Damping Ratio	0.7 ± 0.3
Non-Linearity, (% Full Range)	≤ 0.05%
Resolution/Threshold	< 0.004°/sec
Output Noise	≤ 0.005°/sec/√Hz (DC to 100 Hz)
Environments	
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +95°C
Vibration Operating* (20 - 2000 Hz, Flat Profile)	5 g _{rms} , 36°/hr/g _{rms}
Vibration Survival* (5.83 g _{rms})	D0160E, Curve C1
Shock Survival (20g 11ms)	D0160E, Category B
Weight	≤ 25 grams

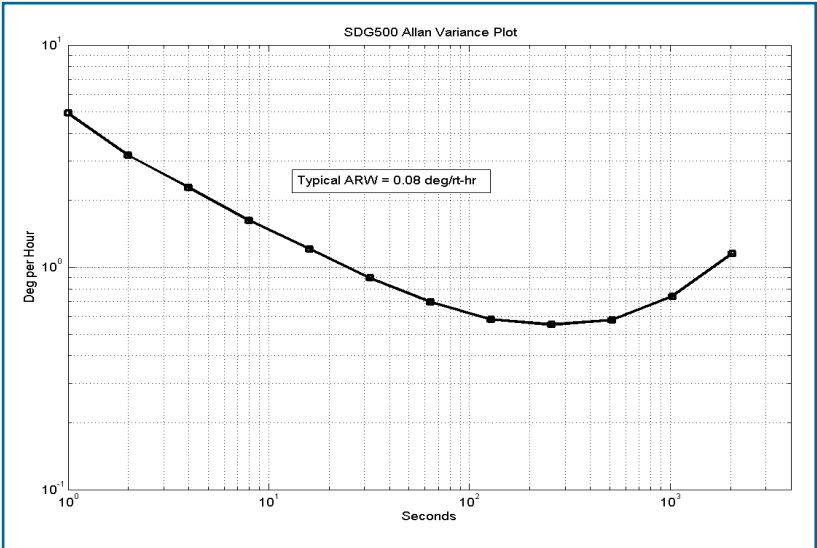

* Please see user's guide for more information regarding vibration tolerance and sensitivity.

For more information, contact:

Systron Donner Inertial
 2700 Systron Drive
 Concord, CA 94518 USA
 +1.866.234.4976 | sales@systron.com

www.systron.com